
Gold Plated Binding Post Module

PRODUCT SPECIFICATION

Package includes:

A. Gold Plated Binding Post Module, 2 pcs

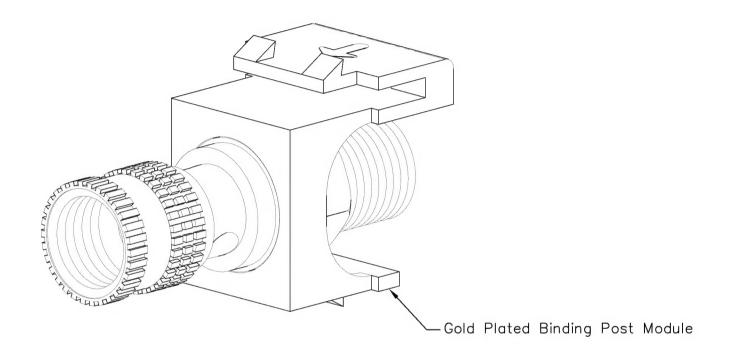



Features and Benefits:


- Gold plating for optimum connection quality and exceptional performance
- Binding posts accept up to 8 AWG multi-stranded audio wire or banana plugs to allow ample current flow to high wattage speakers providing superior fidelity sound
- Easy installation with a set-screw connection for incoming up to 8 AWG audio cable on the rear side
- Angled front and rear wire inserts for easy speaker wire termniation
- Supplied as a pair with red and black bands for easy polarity identification
- Provides a clean and neat appearance installation
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes
- Available in almond, black, ivory, and white
- ANSI/TIA-568-C and UL 1863 compliant

MODULE, BINDING POST, GOLD PLATED			Sec.
ITEM NO.	IC107PMGXX	REV. A	Premium Products
DWG NO.	PS107PMG00	PAGE NO. 1	<u>Proven Performance</u> <u>Competitive Prices</u>

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr., Suite D., Fullerton, CA 92831 * www.icc.com

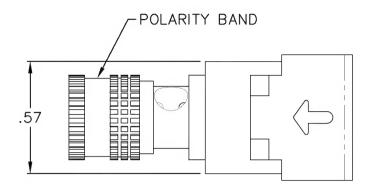



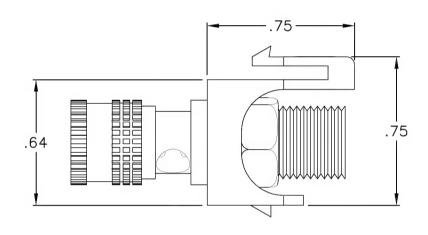

NOTE: UNLESS OTHERWISE SPECIFIED

- 1. HOUSING:
 - A. MATERIAL: ABS, UL 94V-0
 - B. COLOR: XX: AL-ALMOND, BK-BLACK, IV-IVORY, & WH-WHITE
- 2. BINDING POST:
 - A. MATERIAL: BRASS WITH 3 MICRON GOLD PLATING
 - B. POLARITY BAND COLOR: 1 BLACK, 1 RED
- 3. ELECTRICAL:
 - A. DIELECTRIC WITHSTANDING VOLTAGE: 1000V RMS AT 60 HZ FOR ONE MINUTE
 - B. DC BULK RESISTANCE: 20m OHM MAX



MODULE, BINDING POST, GOLD PLATED			FCC
ITEM NO.	IC107PMGXX	REV. A	<u>PremiumProducts</u> <u>ProvenPerformance CompetitivePrices</u>
DWG NO.	PS107PMG00	PAGE NO. 2	

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com